

SRX800 S E R I E S


PURPOSEFUL DESIGN | DRIVECORE POWERED | PREMIUM DSP



QUICKSTART GUIDE


SRX818SP | SRX828SP

UNBOX IT

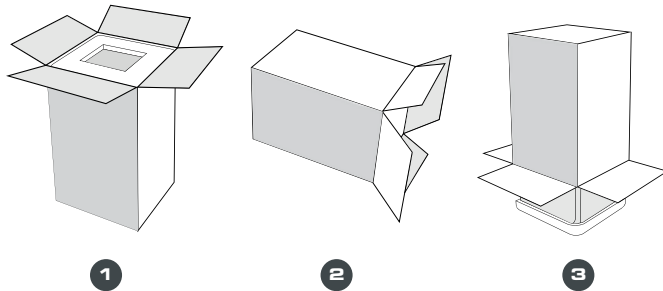


1. Open the top of the box.
2. Lay box on its side.
3. Turn box upside down, then lift box up to reveal speaker.


OPTIONAL SETUPS

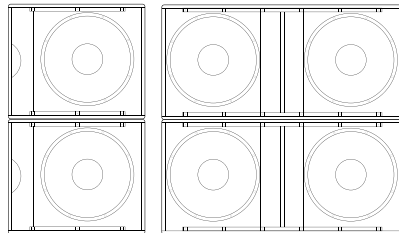


1



2

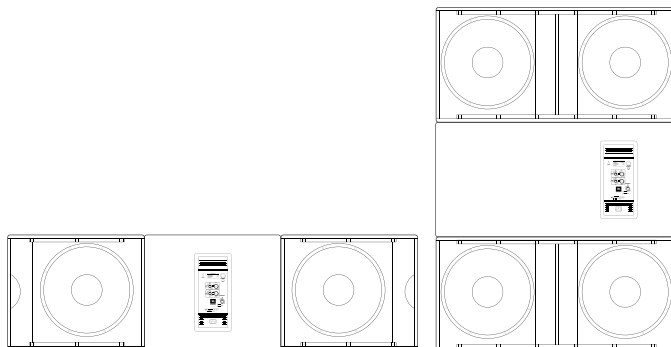


3

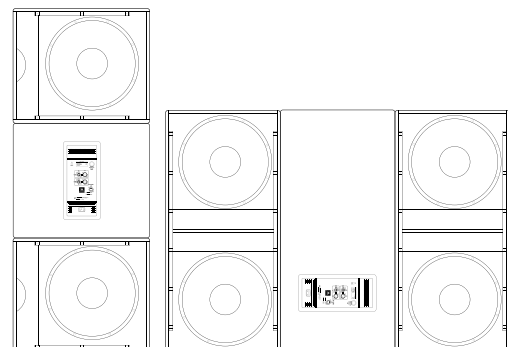


4

1. Stacked Subs
2. Subs with 3-way speaker

3. Cardioid Subs
4. Cardioid Subs Vertical

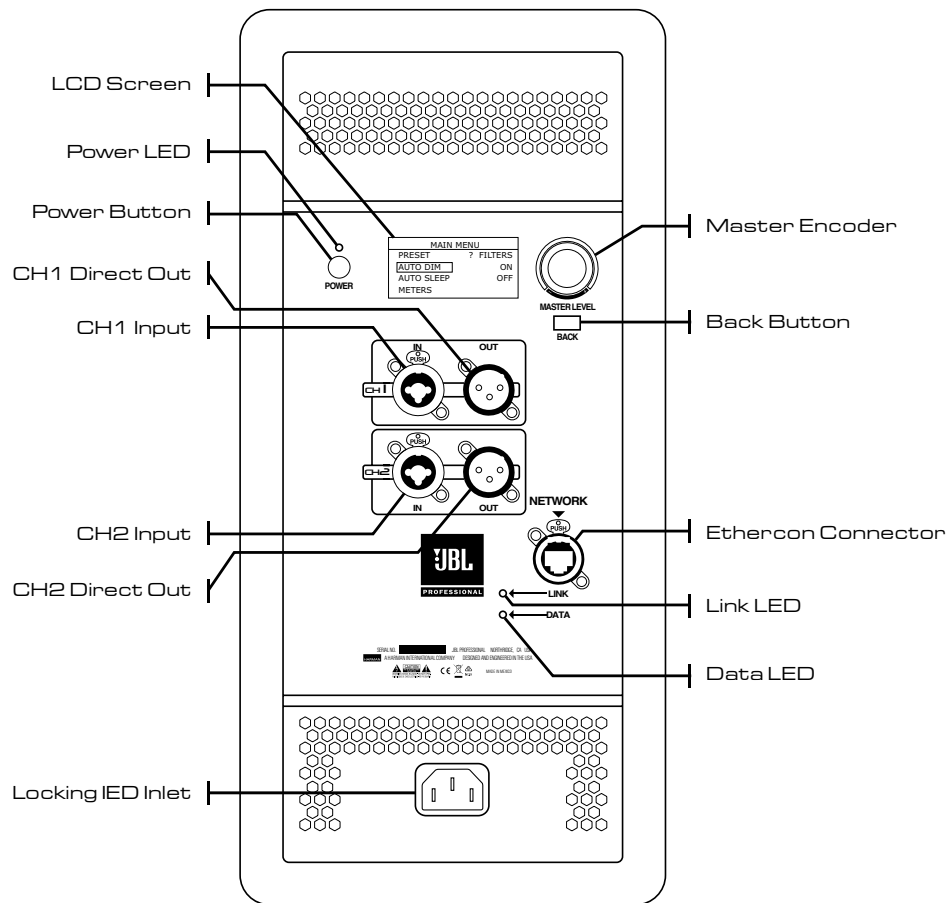

POWER IT ON

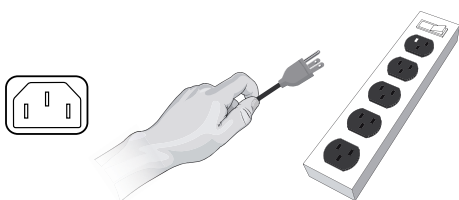

1. Connect the supplied power cord to the Blue IEC inlet on the rear of the speaker
2. Connect the power cord to an available power outlet. Once the power cord is plugged into the power source, the Green Power LED will illuminate.
3. Once the Green Power LED illuminates, press the Power Button. After several seconds, you will notice the LCD Screen boot and you will now be on the main screen.

PLUG IN THE INPUTS

1. The Master Level defaults to 0dB. It's a good idea to turn the Master all the way down before plugging in.
2. Connect XLR or TRS Cable from audio source to CH1 and/or CH2 Inputs.

SET OUTPUT LEVEL

1. Turn the input source level up to at the source until its reached the desired level. You can view input meters by accessing the Input Level screen in the menu by pressing the Master Encoder and selecting it from the list.
2. Once the input(s) has reached the desired level, turn the Master Encoder until the desired output volume is reached.

Please visit jblpro.com/SRX800 for complete documentation.