





Key Features

- USB capture video complying with UVC for live streaming
- 4CH HDMI inputs
- 2" TFT display on board to Live preview four inputs
- Auto cut and manual switch (T-Bar)
- 14 transition effects on T-Bar
- Support PIP (Picture-In-Picture)
- Audio offers embedded or external source to select
- Support switch between 6-Picture PVW and PGM to HDMI Out
- Licensed features including DSK, PTZ control etc.
- Control by PC or mobile phone (via APP)
- Compact design

Application Diagram

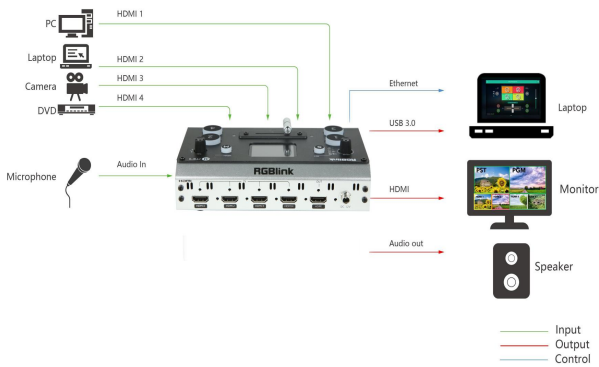

Dimensions

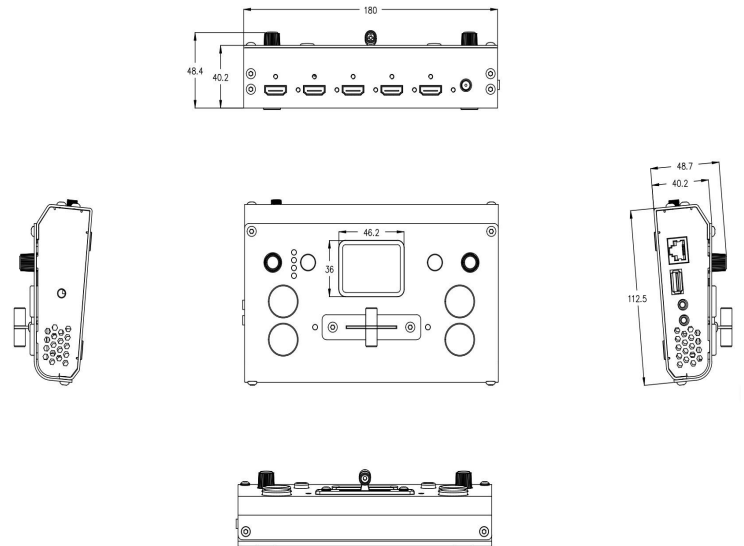

Order Codes

Product Code	Item
230-0001-01-0	mini

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice



www.rgblink.com



Specification

Connectors	Input	HDMI In	4×HDMI-A	
	Output	HDMI Out	1×HDMI-A	
		USB 3.0	1×USB TypeA	
	Audio	In	1×3.5mm Stereo Jack	
		Out	1×3.5mm Stereo Jack	
Power		1×DC Jack		
Performance	Input Resolutions	HDMI		
		SMPTE	720p@50/60 1080i@50 1080p@23/24/30/50/60	
	VESA	1024×768@60 1280×720@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1440×900@60 1600×1200@60 1680×1050@60 1920×1080@60 1920×1200@60		
	Output Resolutions	<i>Choose standard</i>		
Supported Standards	HDMI	1.3		
	USB	3.0		
	Streaming	1280×720@60 1920×1080@60		
Power	Input Voltage	DC 12V/1.5A		
	Constant Power	13.2W		
	Max Power	18W		
Environment	Temperature	-0℃ ~ 70℃		
	Humidity	10%~85%		
Physical	Weight	Net	0.6kg	
		Packaged	1.1kg	
	Dimension	Net	180mm×112.5mm×48.7mm	
		Packaged	255mm×145mm×75mm	40pcs/610mm×570mm×395 mm CTN

