

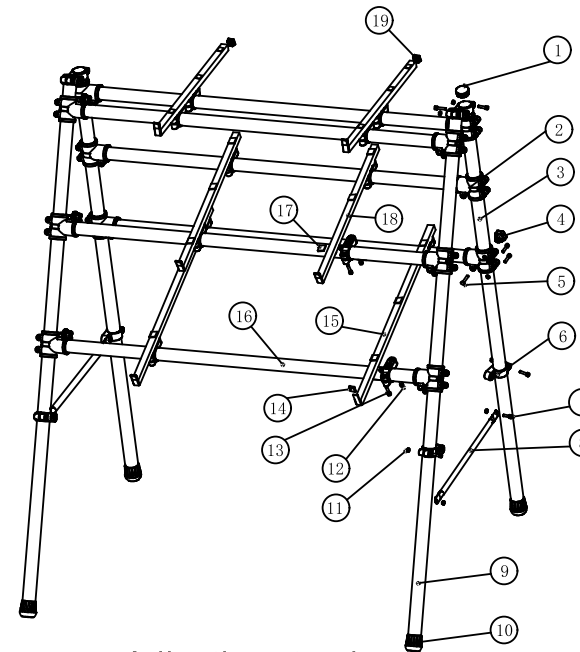


KS052A-3-120/KS052A-3-150 MaterialList				
No.	Material	Quantity	Spec	Pic
①	φ 38 end cap	4		
②	T-joint	12		
③	Short pole	2	φ 38*1370	
④	Knob for T-joint	12		
⑤	M6 • 29 bolt	12	M6*29	
⑥	Joint clip	20		
⑦	M6 • 20 bolt	4	M6*20	
⑧	Joint pole	2		
⑨	Long pole	2	φ 38*1600	
⑩	Foot	4		
⑪	Hex nut	36	M6	
⑫	M6 • 30 bolt	14	M6*30	
⑬	M6 • 25 bolt	44	M6*25	
⑭	End cap front	6		
⑮	Long bar	2	20*20*695	
⑯	Horizontal pole	6	φ 38*1192(KS052A-120) φ 38*1492(KS052A-150)	
⑰	EVA sticker	18		
⑱	Short bar	4	20*20*450	
⑲	End cap back	6		
⑳	Wrench	1		

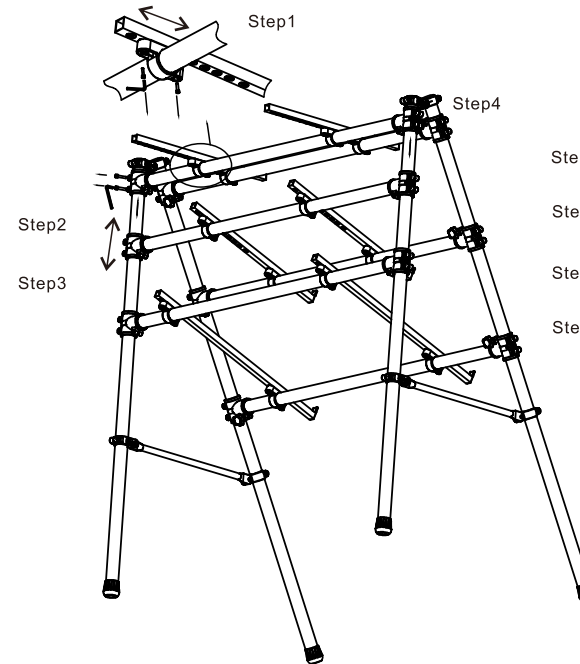

Adjusting stand

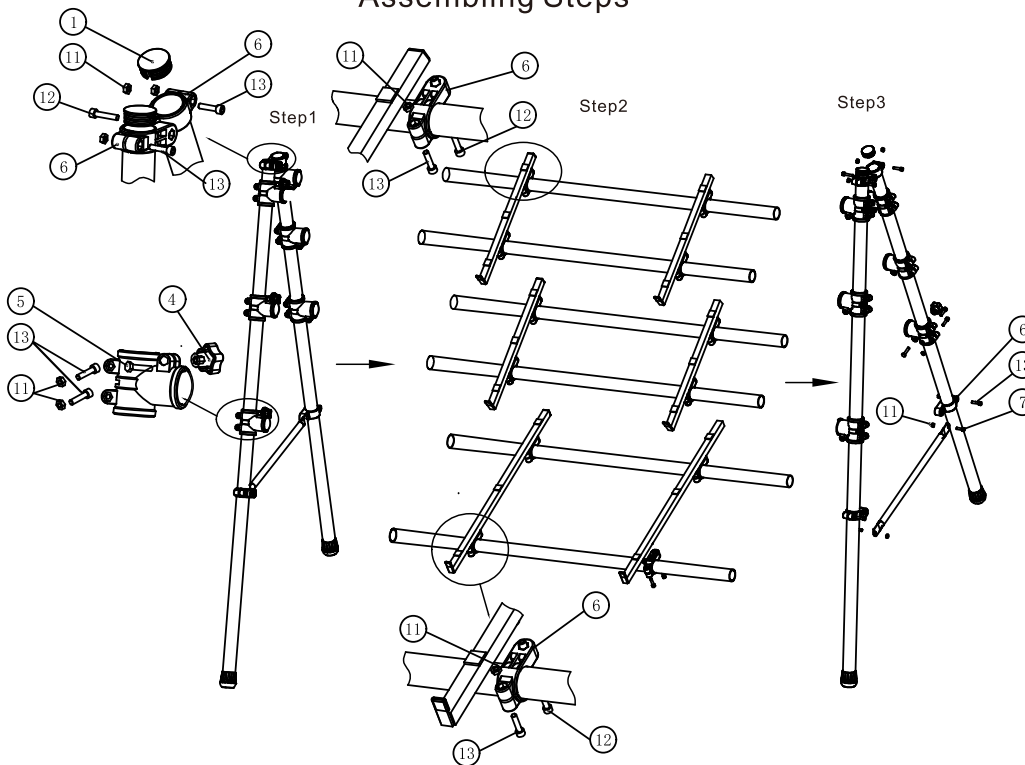

- Step1: Release the bolts in the joint clip of the bar
- Step2: Release the bolts in the T-joint of the horizontal pole.
- Step3: Move the T-joints and the horizontal pole to a wanted position, and screw the bolts..
- Step4: Move the bars to a wanted position, and locate the joint clips to the screw holes on the bar, and screw the bolts.