
Fender®

HAMMERTONE®

BREAKUP DRIVE

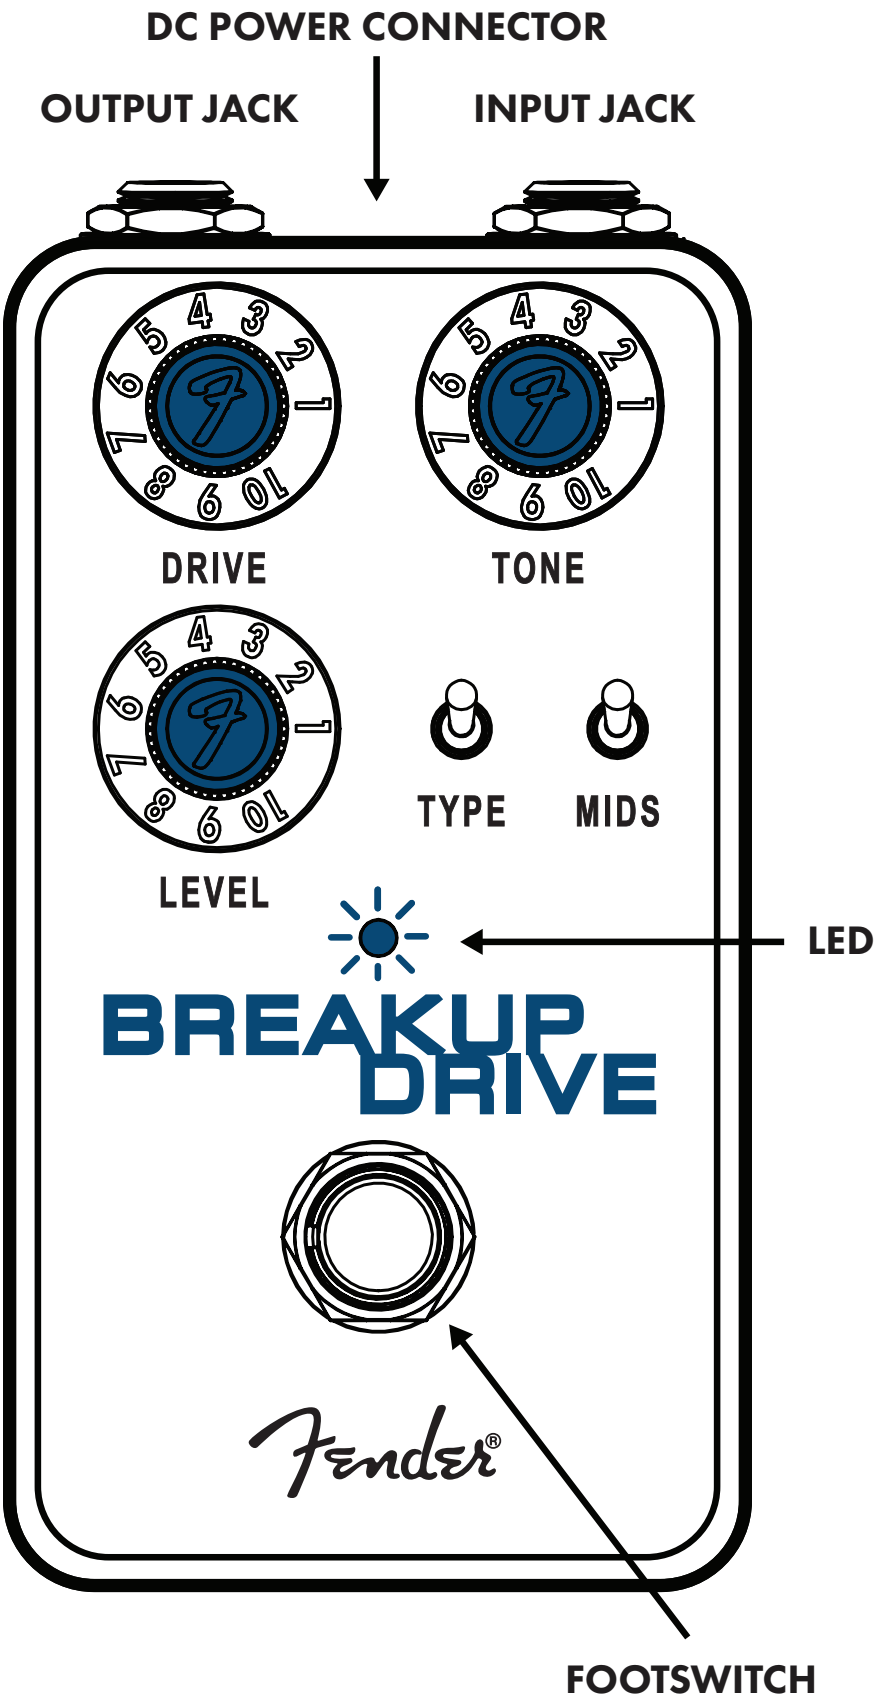

9V BATTERY SCREW ACCESS ON REAR

HAMMERTONE BREAKUP DRIVE

The Hammertone Breakup Drive is designed with one focus in mind: replicating the dynamic response of hot tubes right at the edge of saturation.

Two selectable clipping modes tailor the drive's character between light breakup and low gain, each supplying an expressive response that cleans up with lighter picking and breaks up more the harder you strum. An expansive tone control and switchable pre-gain mids boost provide powerful frequency shaping tools to hone your final sound. From flavoring your core clean tone to delivering dynamic overdrive on tap, the Hammertone Breakup Drive has you covered.

OUTPUT JACK
Low-impedance output connects to amp or next pedal in signal chain.

INPUT JACK
High-impedance input for electric guitar, bass, acoustic guitars with pickup systems, keyboards and other instruments.

DC POWER CONNECTOR
Connect DC adapter here. Standard center-negative jack for use with appropriate power supplies. Accepts 9V-18VDC. Higher voltage provides 6dB of additional headroom.

DRIVE CONTROL KNOB
Adjusts the level of gain present in the signal.

TONE CONTROL KNOB
Full-frequency tone control adjusts the signal's tonal character. Set to 5 for flat frequency response. Turn clockwise to boost treble and low-mid frequencies; counterclockwise to cut treble and low-mid for more pronounced mid frequencies.

LEVEL CONTROL KNOB
Adjusts output signal volume.

TYPE SWITCH
Two-position switch selects the type of clipping saturation introduced by turning up the DRIVE control. DOWN position selects low saturation, providing a range from gritty boost to light drive. UP position selects higher saturation, providing a range from overdrive to medium-gain amp tones.


MIDS SWITCH
Provides a 9dB mid-boost to the signal before the clipping stage.

BYPASS FOOTSWITCH/LED
Footswitch turns effect on and off using relay true bypass. LED Illuminates when effect is on.

BATTERY COMPARTMENT (REAR)
Screw-access compartment houses 9V battery.

BATTERY COMPARTMENT

Remove cover using a flat-head screwdriver.

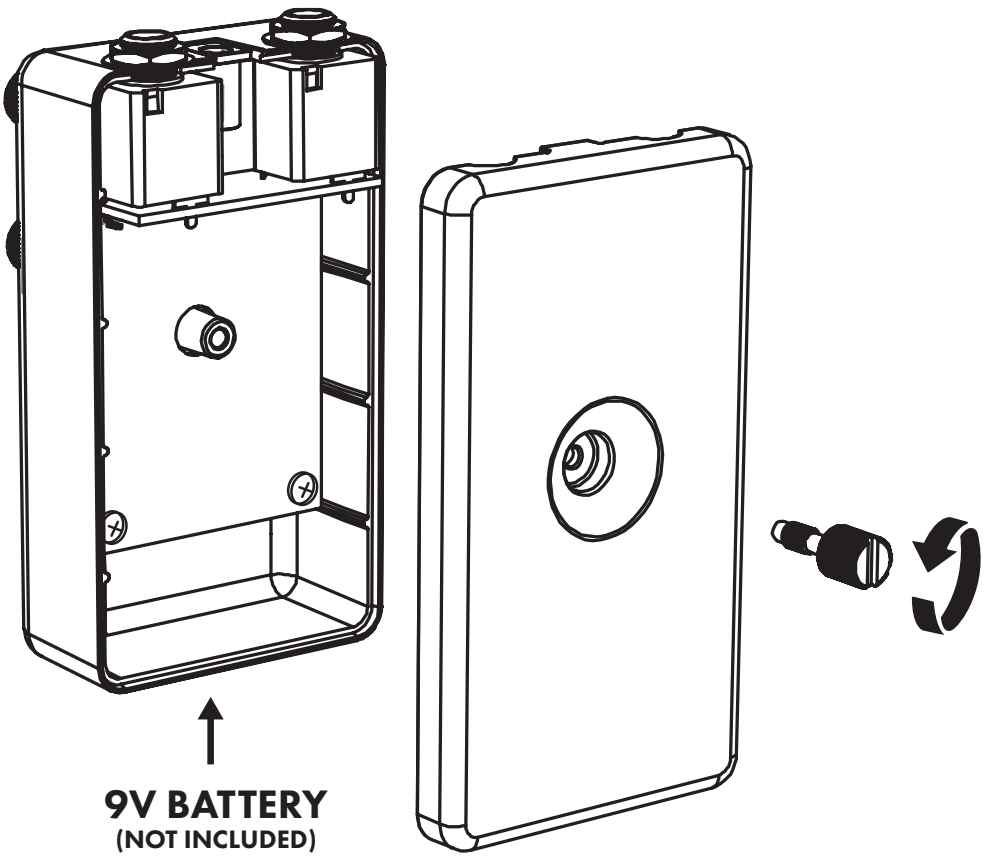

A PRODUCT OF
FENDER MUSICAL INSTRUMENTS CORPORATION
311 CESSNA CIRCLE
CORONA, CALIFORNIA, 92878 U.S.A.

Fender® and Hammertone® are registered trademarks of FMIC.

Copyright © 2025 FMIC. All rights reserved.

PN 70-82000350 REV A

IMPORTANT SAFETY INSTRUCTIONS

- WARNING: To prevent damage, fire or shock hazard, do not expose the unit or its AC power to rain or moisture.
- Do not alter the AC plug of the connected power adapter.
- Do not drip or splash liquids on the unit.
- No user serviceable parts inside, refer servicing to qualified personnel only.
- WARNING: The unit must only be connected to a safety agency certified, regulated, power source (adapter), approved for use and compliant with applicable local and national regulatory safety requirements.
- Unplug the AC power adapter before cleaning the unit exterior. Use only a damp cloth for cleaning and then wait until the unit is completely dry before reconnecting it to power.
- Amplifiers and loudspeaker systems, and ear/headphones (if equipped) are capable of producing very high sound pressure levels which may cause temporary or permanent hearing damage. Use care when setting and adjusting volume levels during use.

ADDITIONAL LANGUAGES

Manual available in additional languages at
www.fender.com/support

SPECIFICATIONS

IMPEDANCES	Input: 1MΩ Output: 470Ω
POWER SUPPLY	85mA min @ 9V-18DC regulated adapter +—◎— - 5.5 x 2.1 mm barrel connector (not included)
POWER REQUIREMENTS	9V-18VDC
DIMENSIONS	2.44" x 4.4" x 2.2" (62mm x 111.8mm x 55.9mm)
WEIGHT	0.50 lbs (0.23kg)

Product specifications subject to change without notice

© FENDER MUSICAL INSTRUMENTS 2025

产品中有害物质的名称及含量

部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
箱体	O	O	O	O	O	O
喇叭单元*	O	O	O	O	O	O
电子部分	X	O	X	O	O	O
接线端子	X	O	O	O	O	O
电线	X	O	O	O	O	O
附件	O	O	O	O	O	O

本表格依据 SJ/T 11364 的规定编制。
O：表示该有毒有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下。
X：表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求。
注：含有有害物质的部件由于全球技术发展水平限制而无法实现有害物质的替代。

*产品含有喇叭单元时有效。