



PR440X


Twisted assembling cable - 2 x 0.5 mm² - 20 AWG

Highlights:

- Twisted & separable wires
- Different colors for pair identification
- Reduced crosstalk due to twisting

Product information:

The PR440x series are twisted assembling cables with a section of 2 x 0.5 mm². They come in various versions with a total of nine different color combinations, allowing a clear overview when running different cables through each other. The conductors are composed of thin and dense strands oxygen free copper and jacketed by flexible PVC. Both conductors are twisted with a fine pitch which reduces the crosstalk between adjacent cables. This makes the PR44xx series cables perfectly suited for integrated cabling purposes such as 19" equipment racks, internal assembly of loudspeaker units or many other wiring purposes where multiple channels are combined.

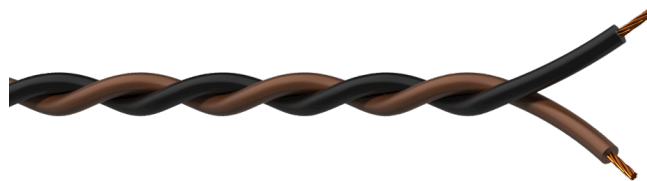

Properties:



Inner Conductors:




Usage:



Physical Characteristics:

Inner conductor	Insulation	Material	PVC 2.2 mm (Ø)
Colours			Black / Yellow (PR4404)
			Black / Brown (PR4401)
			Black / Red (PR4402)
			Black / Orange (PR4403)
			Black / Green (PR4405)
			Black / Blue (PR4406)
			Black / Purple (PR4407)
			Black / Grey (PR4408)
Material		BC 28 x 0.15 mm (Ø) (OFC)	
Type of cable			2-core loudspeaker cable
Inner conductor	Section	0.5 mm²	
		American Wire Gauge	20 AWG
		Number of conductors	2
		Conductor twisting	Yes

Cross sections:



Variants:

- PR4402/1 - 100 meter, black & red
- PR4403/1 - 100 meter, black & orange
- PR4404/1 - 100 meter, black & yellow
- PR4405/1 - 100 meter, black & green
- PR4406/1 - 100 meter, black & blue
- PR4407/1 - 100 meter, black & purple
- PR4408/1 - 100 meter, black & grey
- PR4409/1 - 100 meter, black & white
- PR4401/1 - 100 meter, black & brown